
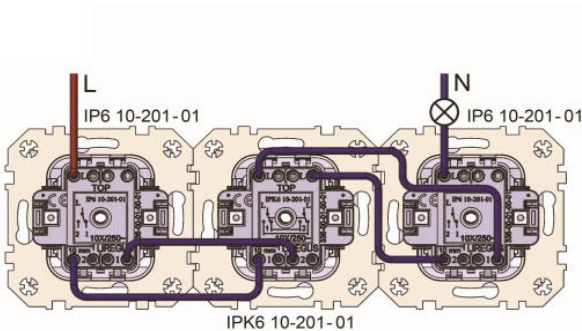




Product data sheet

2way, 1-pole intermediate switch, 10A



Reference number

IPK6.10-201-01.M

Flush mount 2way, 1-pole intermediate switch 10A/250V~, without frame

- 1 pole
- 1 mm. thickness metal supporting frame, for claw or screw mounting;
- screwless terminals for wires up to 2.5 mm²

Intended use

- dept 27mm
- installation in flush box according to DIN 49073
- operation with suitable cover
- fits to all Modern serie frames

Centre plates colour, EAN code:

- IPK6.10-201-01.M/WM - White matt, 4770025003893, 10pc. package code 4770025003909;
"10pc.profi box": 4770025003916;
- IPK6.10-201-01.M/SM - Sandy matt, 4770025005231, 10pc. package code 4770025005248 ;
- IPK6.10-201-01.M/CH - Champagne, 4770025004531, 10pc. package code 4770025004548;
- IPK6.10-201-01.M/BM - Black matt, 4770025005859, 10pc. package code 4770025005866;

Technical specifications:

Input voltage, frequency

AC 250 V +- 10% , 50/60 Hz
IP20

Standarts

EN 50581
EN 60669-1
Low-Voltage Directive 2014/35/EU
RoHS Directive 2011/65/EU

Switching current

10A

Ambient temperature

-5 ... +35 °C

Storage/transport temperature

-20 ... +40 °C

Connection

spring terminals

Centre plates material

breakproof polycarbonate (PC), matt

Custom tariff number

8536500700

Dimmensions, mm (HxWxD)

70x70x27

