


Product data sheet

2way, 1-pole intermediate switch, 10A

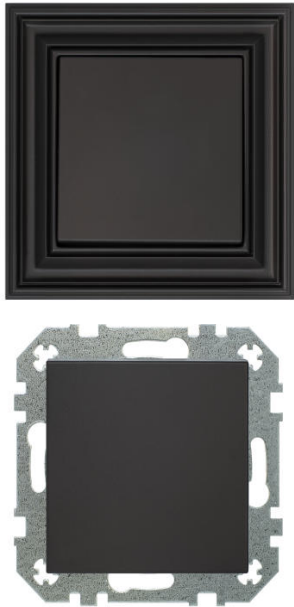

Reference number

IPK6.10-201-01

Flush mount 2way, 1-pole intermediate switch 10A/250V, without frame


1 pole
screwless terminals for wires up to 2.5 mm²

Dept ~25mm;
Installation in flush box according to DIN 49073;
Metal supporting frame, for screw mounting;
Intended use, IP 2X protection;
Fits to all Retro and Epsilon serie frames;

Polycarbonate plastic (scratch-proof, PC). Surface sprayed manually by Alpocryl Emaillack paint, (developed in Switzerland), and lacked with matt lack. Paint has high UV resistance, is flame resistant according to DIN EN13501-1 and chemically resistant according to DIN 68861/1B.

Centre plates colour, EAN code:

IPK6.10-201-01.R/ON31 - mat brown, 4770025967379; package barcode 4770025967386;
IPK6.10-201-01.R/ONC - mat sandy, 4770025000229; package barcode 4770025000236;
IPK6.10-201-01.R/ON59 - mat black, 4770025001165; package barcode 4770025001172;

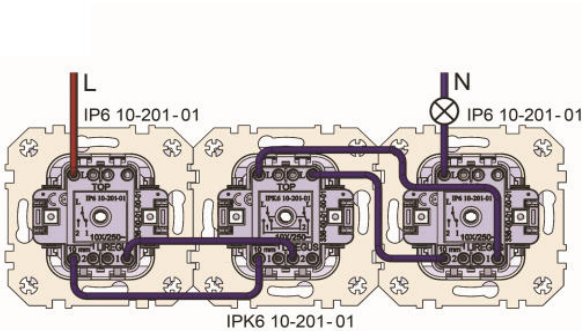

Technical specifications:
Input voltage, frequency

AC 250 V +- 10% , 50/60 Hz

Standarts

EN 50581
EN 60669-1
Low-Voltage Directibe 2014/35/EU
RoHS Directive 2011/65/EU

Switching current
Ambient temperature
Connection
Storage/transport temperature
Customs tariff number

10A
-5 ... +35 °C
spring terminals
-20 ... +40 °C
8536500700