


Product data sheet

LIREGUS

Rotary dimmer



Reference number

ISR-002-01 /DEP-01

Universal rotary dimmer for standart incandent lamps light level control, without frame

incremental control without end position
with satellite input

Intended use

- Switching and dimming of lighting (10-100%);
- Operation with suitable cover;
- Installation in 60mm flush box, according to DIN 49073;

Product characteristics


- Device can be operated without neutral conductor;
- Switch-on via bulb-preserving soft start;
- Switch-on with last brightness;
- Connection of satellite units possible;
- Electronic over-temperature protection;
- Power extension possible by means of power boosters.

Centre plates colour, EAN code:

ISR-002-01.R/ON31 - mat brown, 4770025967539; package barcode 4770025967546

ISR-002-01.R/ONC - mat creamy, 4770025000380; package barcode 4770025000397;

ISR-002-01.R/ON59 - mat black, 4770025001325; package barcode 4770025001332;

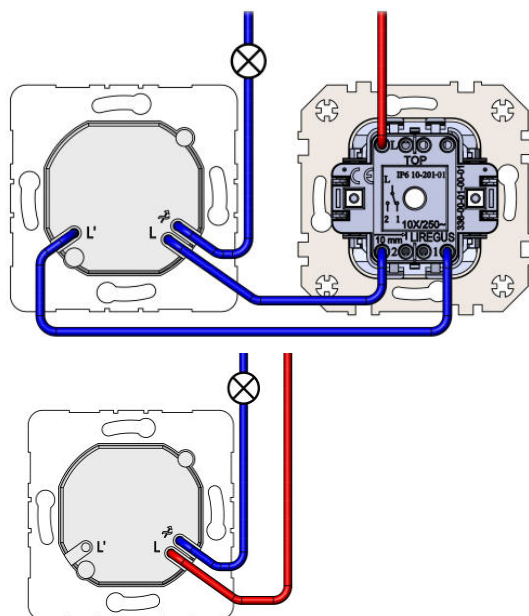

Technical specifications:

Rated voltage, frequency

AC 230 V , 50 Hz, +10%

Stand-by power

approx. 0.35 W

Power loss

approx. 4 W

Ambient temperature

-5 ... +45 °C

Connected load at 25 °C:

Incandescent lamps

40 ... 400 W

HV halogen lamps: 230V and 12V (toroidal transformer)

40 ... 400 W

Control devices

triac

IP protection

IP20

Dimensions

50 x 51 x 51mm

Weight

0,130kg

Surge voltage 2KV (PN-EN 60669-1)

Applicable standards:

PN-EN 60669-1, PM-EN 60669-2-1