
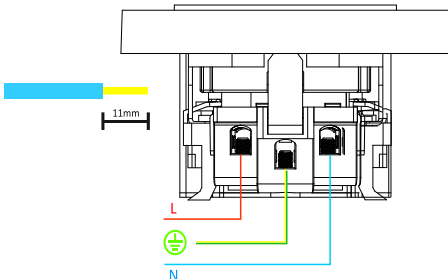



Product data sheet

SCHUKO® socket with 2 USB ports



Reference number

IUK-3-01.M (G610)

Flush mount, SCHUKO® socket with earth contacts with smart USB charger for electronic devices with 1 port “type A”, and 1 port “type C”, without frame

SCHUKO® socket outlet;
USB ports type A+C;
screw fixing, with spreader claws.

Intended use

- battery charging station for mobile devices with USB-A or USB-C connection;
- installation in flush box according: DIN 49073 (dept ~35mm), or EN 60670-1;
- socket outlet with earth contacts, 16A;
- charging current: max. 3400 mA;
- operation with suitable Modern serie cover.

Product characteristics

- Ideal for cafés, hotels or, own four walls, office – wherever you need new energy for your smartphone or tablet quickly: single USB-A or USB-C port. Depending on the connected mobile device, increases the voltage level.
- Support the following standards: Apple 2.4A, Samsung adaptive charging;
- Installation into multiple frame (1-6 place) with other devices possible;
- Polycarbonate plastic (scratch-proof, PC).

Centre plates colour, EAN code:

IUK-3-01.M/WM - White mat, 4770025004074; 10pc. package barcode 4770025004081;
IUK-3-01.M/SM - Sandy mat, 4770025005415; 10pc. package barcode 4770025005446;
IUK-3-01.M/CH - Champagne, 4770025004715; 10pc. package barcode 4770025004722;
IUK-3-01.M/BM - Black mat, 4770025006030; 10pc. package barcode 4770025006047;

Technical specifications:

Input voltage, frequency	AC 220 ... 250 V ~ +- 10% , 50/60 Hz
Output current, SCHUKO® socket	AC 220 ... 250 V ~, 16A, IP20
Output current USB charger (both using)	max. 3400mA, 25W max. efficiency 83%
USB-A charger only	2.4A max
USB-C charger only	3.0A max
Connection mode:	
single wire	screw terminals, for wires 2,5mm² - 4mm²
stranded without ferrule	screw terminals, for wires 2,5mm² - 4mm²
Screw tightening torque max- 1,2 Nm	according to standart 884-1 IEC:1994
Storage/transport temperature	-20 ... +40 °C
Ambient temperature	-5 ... +35 °C
Centre plates material	polycarbonate (PC)
Customs tariff number	8536699008
Dimmensions, mm (HxWxD)	70x70x35

